

RAY SUSPENDED

12-Sep.-2018

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE IP20 0,3m 36°

2.0

200mm

white texture
aluminium brushed
copper
black texture

207764W_
207764L_
207764P_
207764B_

3.0

300mm

white texture
aluminium brushed
copper
black texture

207864W_
207864L_
207864P_
207864B_

LIGHT COLOUR

2700K | >90CRI | 420lm

3

3000K | >90CRI | 440lm

5

1800-2850K | >95CRI | 360lm

9

2.0 | 3.0 PAR16

max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 0,9m

2.0

200mm

white texture
aluminium brushed
copper
black texture

207720W0
207720L0
207720P0
207720B0

3.0

300mm

white texture
aluminium brushed
copper
black texture



207820W0
207820L0
207820P0
207820B0

OPTIONAL


for PAR16 lamps see our catalogue

* For this product, the cable with a plug that comes with the LED module is not needed. Please remove it first and then use the LED module.

not needed (this notification refers to the part of the cable)

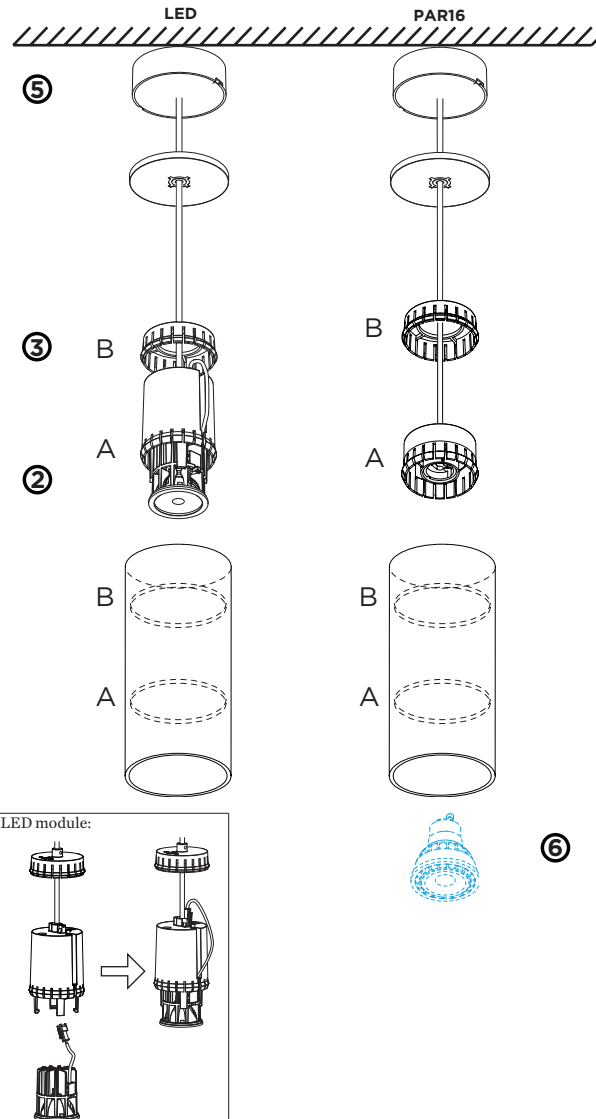

DIMENSIONS




MOUNTING INSTRUCTION

- 1 ONLY FOR LED: mount the LED module into the suspension set.
- 2 Insert part A until it clicks in the lower part of the cover
- 3 Insert part B until it clicks in the higher part of the cover
- 4 POWER CONNECTION

Connect wiring to the power supply (for LED) or to terminal block (for PAR16)

PARALLEL CONNECTION



- 5 Mount the ceiling base on the ceiling
(You have to turn the cover counterclockwise a quarter in order to loosen it from the ceiling base and mounting back on is by turning clockwise.)
- 6 ONLY FOR PAR16
Insert the lamp



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Spinnerijstraat 99/21 8500 Kortrijk

INSTALLATION
INSTRUCTIONS